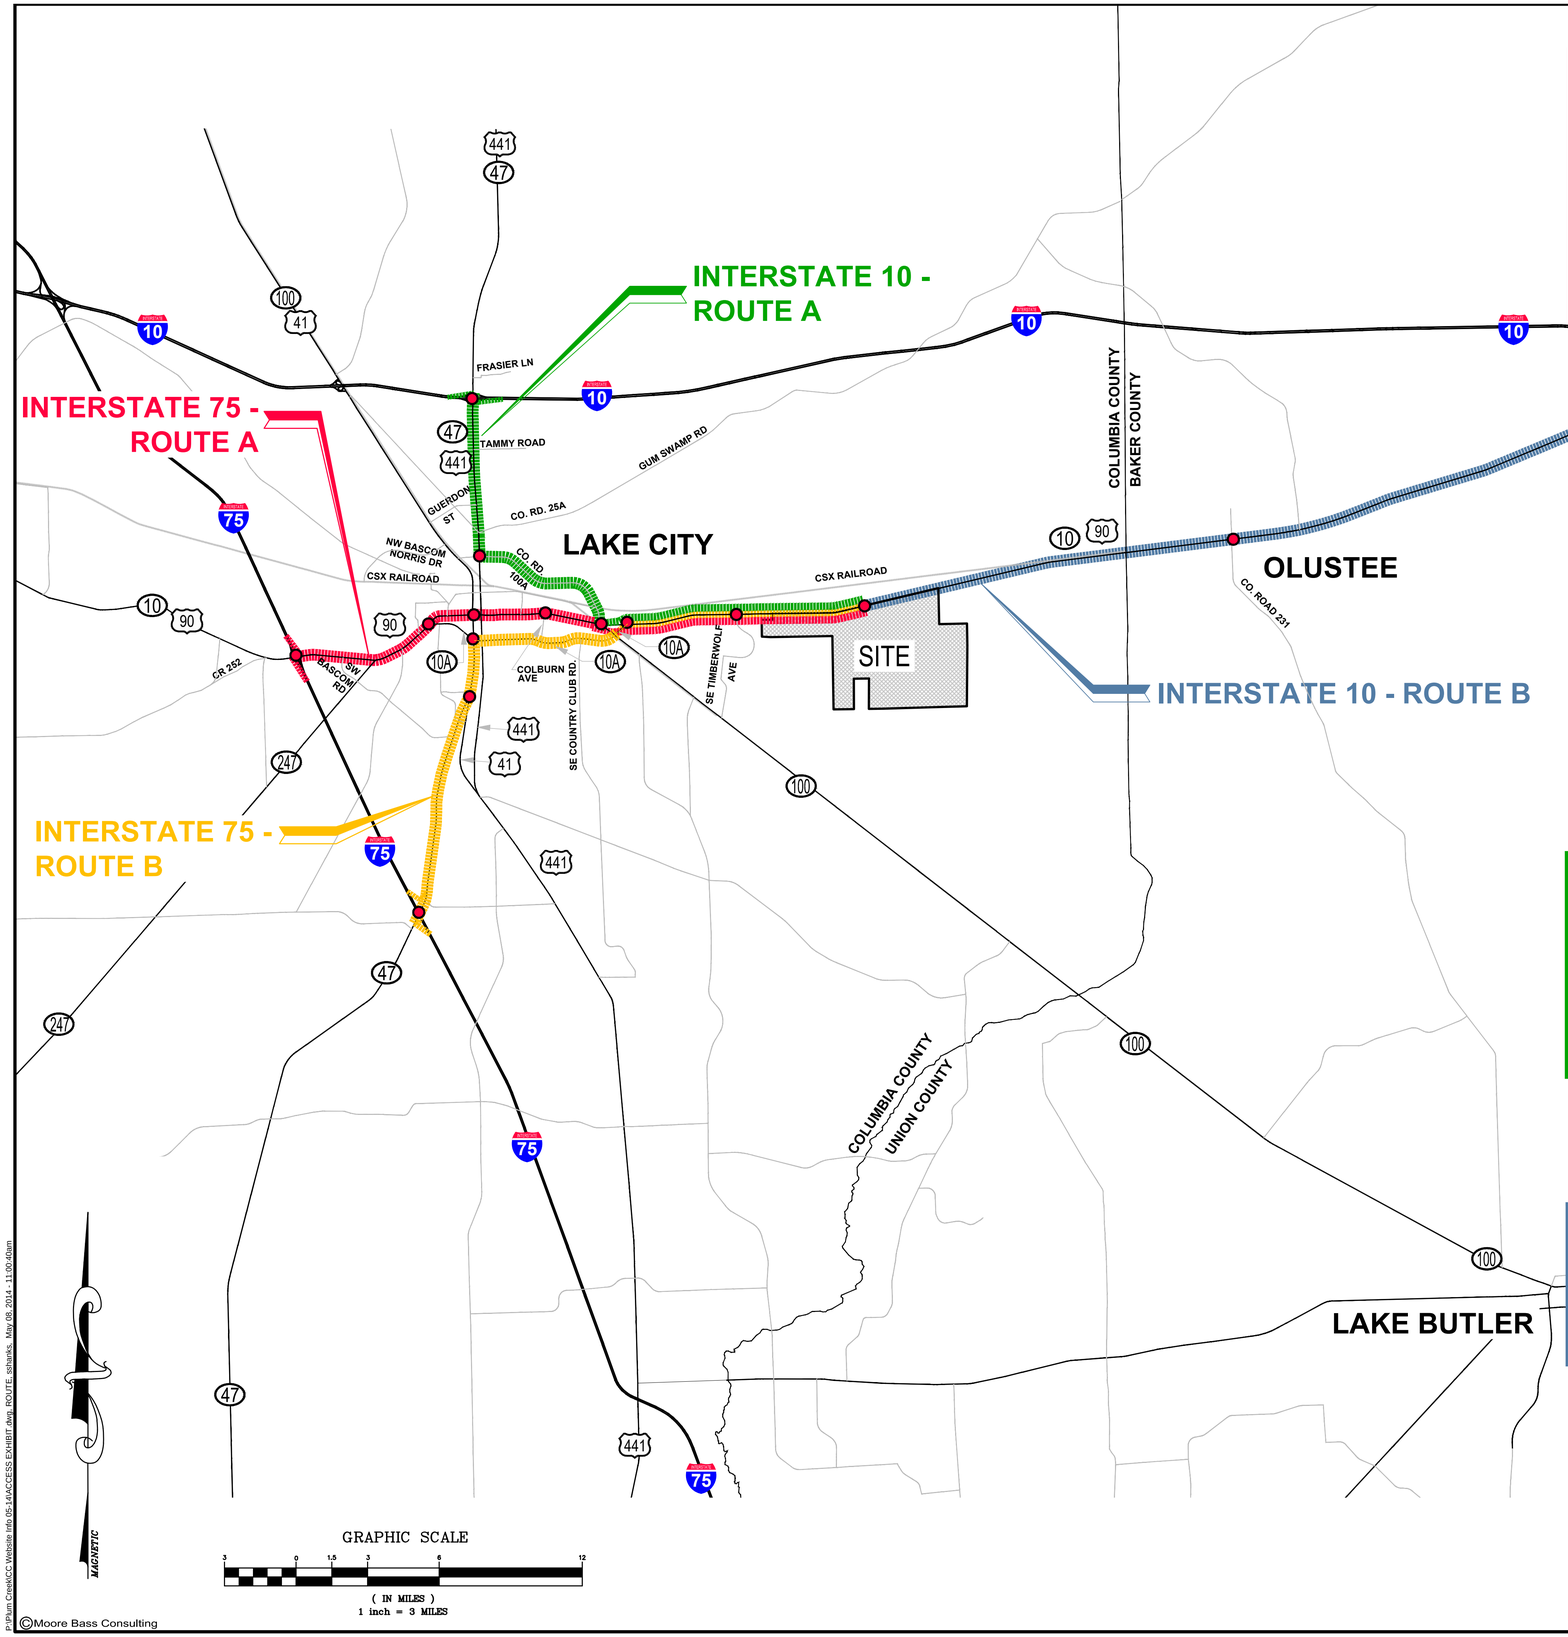

Interstate 75 - Route A

Route Name	Roadway Name	Segment Name	Segment Length	Segment Cross Section	Classification	Description of traffic control devices within the segment
75A	US 90	Project Entrance to SE Timberwolf Av	2.2 miles	2 lane with paved shoulders	Rural	overhead flashing amber light at SE Timberwolf Ave. intersection
75A	US 90	SE Timberwolf Ave. to CR 100A	2.2 miles	4 lane divided with paved shoulders	Rural	traffic signal at State Hwy 10A intersection, traffic signal at CR 100A intersection
75A	US 90	CR 100A to SE Colburn Ave	1.0 mile	4 lane undivided	Urban	signalized railroad crossing @ Norfolk Southern
75A	US 90	SE Colburn Ave to US 41	1.1 miles	4 lane with paved median lane		traffic signal at US 441 intersection, traffic signal at US 41 intersection
75A	US 90	US 41 to State Hwy 10A	0.7 miles	4 lane with paved median lane	Urban	traffic signals at the following intersections: NW Lake Jeffrey Road State Hwy 10A
75A	US 90	State Hwy 10A to Interstate 75	2.4 miles	6 lane divided	Urban	traffic signals at the following intersections: commercial plaza entrance (Lake City Professional Plaza), NW Ridgewood Ave, SW Sisters Welcome Road, Old Troy Road, CR 247, Mall Entrance, NW Bascom Norris Drive, SW Real Terrace, NW Brookside Ct, SW Commerc
75A	US 90	Interstate 75 north bound ramp	0.2 miles	ramp	Rural	No bridges or underpasses
75A	US 90	Interstate 75 south bound ramp	0.2 miles	ramp	Rural	Interstate 75 underpass (14'-4")(2E/3W) then exit left to south bound ramp
		Total Length of Route 75A	9.6 miles			

Interstate 75 - Route B

Route Name	Roadway Name	Segment Name	Segment Length	Segment Cross Section	Classification	Description of traffic control devices within the segment
75B	US 90	Project Entrance to SE Timberwolf Ave.	2.2 miles	2 lane with paved shoulders	Rural	overhead flashing amber light at SE Timberwolf Ave. intersection
75B	US 90	SE Timberwolf Ave. to State Hwy 10A	1.9 miles	4 lane divided with paved shoulders	Rural	traffic signal at State Hwy 10A intersection
75B	State Hwy 10A	US 90 to US 41	2.7 mile	4 lane with paved median lane	Urban	traffic signal State Hwy 100 intersection, signalized railroad crossing @ Norfolk Southern, traffic signals at the following intersections: Defender Ave., Avalon Ave, SE Emine Ave, US 441, US 41
75B	US 41	US 41 to US 41/State Hwy 47 merge	1.0 mile	4 lane divided with paved shoulders	Urban	traffic signal at SW Margarets Street
75B	State Hwy 47	State Hwy 47 merge to I-75	3.7 miles	4 lane divided with paved shoulders	Urban	traffic signals at the following intersections: SW Bascom Norris Drive, SW Ring Court
75B	State Hwy 47	Interstate 75 north bound ramp	0.2 miles	ramp	Rural	No bridges or underpasses
75B	State Hwy 47	Interstate 75 south bound ramp	0.2 miles	ramp	Rural	Interstate 75 underpass (2N/2S) then exit left to south bound ramp
		Total Length of Route 75B	11.5 miles			

Interstate 10 - Route A

Route Name	Roadway Name	Segment Name	Segment Length	Segment Cross Section	Classification	Description of traffic control devices within the segment
10A	US 90	Project Entrance to SE Timberwolf Ave.	2.2 miles	2 lane with paved shoulders	Rural	overhead flashing amber light at SE Timberwolf Ave. intersection
10A	US 90	SE Timberwolf Ave. to CR 100A	2.2 miles	4 lane divided with paved shoulders	Rural	traffic signal at State Hwy. 10A intersection, traffic signal at CR 100A intersection
10A	CR 100A	US 90 to US 441	2.6 miles	2 lane with paved shoulders	Rural	signalized railroad crossing @ CSX, traffic signal at US 441Intersection
10A	US 441	CR 100A to Interstate 10	2.6 miles	4 lane with paved median lane	Urban	traffic signal at NE Gum Swamp Road intersection
10A	US 441	Interstate 10 east bound ramp	0.2 miles	ramp	Rural	No bridges or underpasses
10A	US 441	Interstate 10 west bound ramp	0.2 miles	ramp	Rural	Interstate 10 underpass (14'-6")(3N/3S) then exit left to west bound ramp
		Total Length of Route 10A	**9.6 miles**			

Interstate 10 - Route B

Route Name	Roadway Name	Segment Name	Segment Length	Segment Cross Section	Classification	Description of traffic control devices within the segment
10B	US 90	Project Entrance to Olustee	6.2 miles	2 lane with paved shoulders	Rural	overhead flashing amber light at CR-231 intersection
10B	US 90	Olustee to Interstate 10	7.8 miles	2 lane with paved shoulders	Rural	none
10B	US 90	Interstate 10 east bound ramp	0.2 miles	ramp	Rural	No bridges or underpasses
10B	US 90	Interstate 10 west bound ramp	0.2 miles	ramp	Rural	Interstate 10 underpass (16'-0" estimated)(2N/2S) then exit right to west bound ramp
		Total Length of Route 10B	**14.0 miles**			

Moore Bass CONSULTING
ATLANTA (770) 914-4664 (Fax) (770) 914-9536
TALLAHASSEE DESTIN
(334) 386-3525
McDonough, Georgia 30253
www.moorebass.com

PROJECT NAME
NORTH FLORIDA INTERMODAL PARK
COLUMBIA COUNTY, FLORIDA

CLIENT NAME
PLUM CREEK
P.O. BOX 357700
GAINESVILLE, FL 32635-7700

REVISIONS

ACCESS EXHIBIT.dwg
ARCHIVE
DATE 5/8/14
FILE #
CONTRACT #
DRAWN BY SDM

The Drawings, Specifications and other documents prepared by Moore Bass Consulting, Inc. (MB) for this Project are instruments of MB for use solely with respect to this Project and, unless otherwise provided, MB shall be deemed the author of these documents and shall retain all common law, statutory and other reserved rights, including the copyright.

SEAL

SHEET TITLE
ACCESS ROUTE MAP

SHEET

©Moore Bass Consulting

P:\Plum Creek\ICC Website Info\05-14\ACCESS EXHIBIT.dwg, ROUTE, rsharks, May 08, 2014 - 11:00:40am